



Project Name: _____
Job #: _____

**Class 150 # - CAST FITTINGS, ASTM A351 -
Regular Pattern**

90° ELBOW

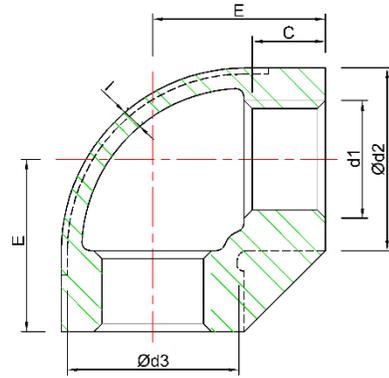

- Grade: T304/CF8 T316/CF8M
 Connection: Threaded
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	d1	d2	d3	C	E	G	H	I
<input type="checkbox"/>	1/8	1/8	0.63	0.53	0.24	0.67	0.14	0.24	0.08
<input type="checkbox"/>	1/4	1/4	0.75	0.61	0.37	0.77	0.16	0.24	0.08
<input type="checkbox"/>	3/8	3/8	0.89	0.77	0.38	0.94	0.16	0.31	0.10
<input type="checkbox"/>	1/2	1/2	1.10	1.02	0.39	1.14	0.12	0.30	0.08
<input type="checkbox"/>	3/4	3/4	1.34	1.24	0.41	1.26	0.12	0.35	0.08
<input type="checkbox"/>	1	1	1.69	1.61	0.55	1.46	0.16	0.39	0.10
<input type="checkbox"/>	1 1/4	1 1/4	2.01	1.89	0.63	1.71	0.20	0.43	0.10
<input type="checkbox"/>	1 1/2	1 1/2	2.32	2.22	0.61	1.89	0.20	0.47	0.10
<input type="checkbox"/>	2	2	2.83	2.68	0.71	2.19	0.22	0.51	0.10
<input type="checkbox"/>	2 1/2	2 1/2	3.54	3.39	0.87	2.64	0.35	0.55	0.12
<input type="checkbox"/>	3	3	4.17	4.02	0.94	3.03	0.39	0.59	0.14
<input type="checkbox"/>	4	4	5.20	5.00	1.02	3.78	0.33	0.65	0.14

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 No Lead
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479