


Project Name: _____

Job #: _____

Class 150# - CAST FITTINGS, ASTM A351 - MSS
SP114 Heavy Pattern

HEAVY PATTERN COUPLING

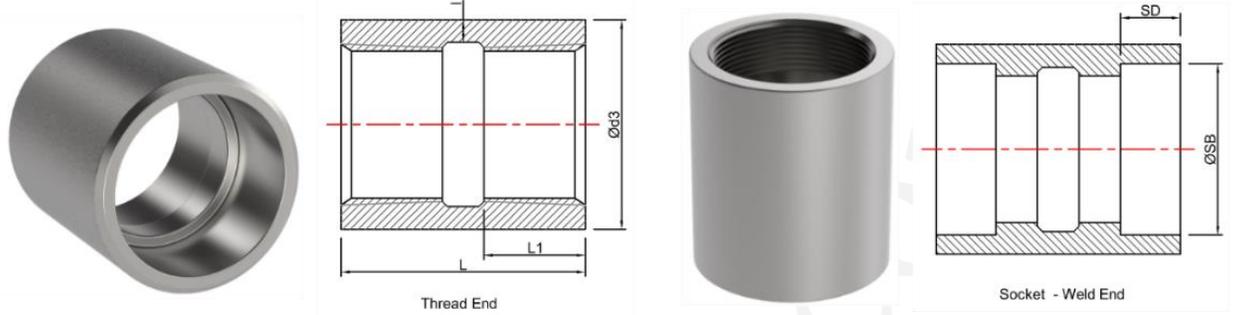

- Grade: T304/CF8 T316/CF8M
 Connection: Threaded Socket weld
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	d3	I	L	L1	SB	SD
<input type="checkbox"/>	1/8	0.75	0.09	1.00	0.25	0.43	0.39
<input type="checkbox"/>	1/4	0.84	0.09	1.00	0.32	0.56	0.39
<input type="checkbox"/>	3/8	1.01	0.10	1.12	0.36	0.69	0.39
<input type="checkbox"/>	1/2	1.20	0.10	1.38	0.43	0.85	0.39
<input type="checkbox"/>	3/4	1.46	0.12	1.50	0.50	1.07	0.51
<input type="checkbox"/>	1	1.77	0.13	1.62	0.58	1.33	0.51
<input type="checkbox"/>	1 1/4	2.15	0.14	2.00	0.67	1.68	0.51
<input type="checkbox"/>	1 1/2	2.43	0.15	2.12	0.70	1.92	0.51
<input type="checkbox"/>	2	2.96	0.17	2.50	0.75	2.41	0.63
<input type="checkbox"/>	2 1/2	3.31	0.21	2.87	0.92	2.91	0.63
<input type="checkbox"/>	3	4.00	0.23	3.22	0.98	3.54	0.63
<input type="checkbox"/>	4	5.06	0.26	3.66	1.08	4.55	0.75

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 Stainless Castings conform to ASTM A351
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479
 Manufactured in accordance to ISO 9001: 2000