



Project Name: _____

Job #: _____

MSS-HEAVY
150# CAST
A351
(H Bush)

Class 150# - CAST FITTINGS, ASTM A351 - MSS **SP114 Heavy Pattern**

HEAVY PATTERN HEX BUSHING

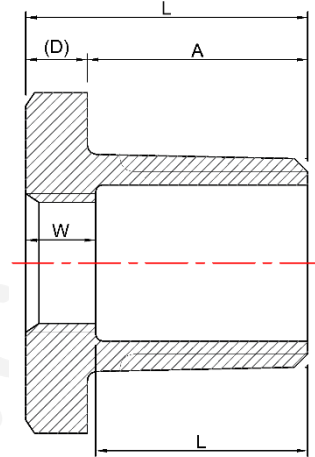

Grade: ☐ T304/CF8 ☐ T316/CF8M
 Connection: ☐ Threaded
 Source: ☐ Import ☐ Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	C	D	L	T
☐	1/4 x 1/8	0.44	0.63	0.12	0.56	0.30
☐	3/8 x 1/8	0.50	0.87	0.16	0.66	0.30
☐	3/8 x 1/4	0.50	0.87	0.16	0.66	----
☐	1/2 x 1/8	0.56	1.00	0.19	0.76	0.30
☐	1/2 x 1/4	0.56	1.00	0.19	0.76	0.46
☐	1/2 x 3/8	0.56	1.00	0.19	0.76	----
☐	3/4 x 1/8	0.62	1.24	0.22	0.84	0.30
☐	3/4 x 1/4	0.62	1.24	0.22	0.84	0.46
☐	3/4 x 3/8	0.62	1.24	0.22	0.84	0.46
☐	3/4 x 1/2	0.62	1.24	0.22	0.84	----
☐	1 x 1/8	0.75	1.37	0.25	1.00	0.30
☐	1 x 1/4	0.75	1.37	0.25	1.00	0.46
☐	1 x 3/8	0.75	1.37	0.25	1.00	0.46
☐	1 x 1/2	0.75	1.37	0.25	1.00	0.60
☐	1 x 3/4	0.75	1.37	0.25	1.00	0.62
☐	1 1/4 x 1/4	0.81	1.75	0.28	1.09	0.46
☐	1 1/4 x 3/8	0.81	1.75	0.28	1.09	0.46
☐	1 1/4 x 1/2	0.81	1.75	0.28	1.09	0.60
☐	1 1/4 x 3/4	0.81	1.75	0.28	1.09	0.62
☐	1 1/4 x 1	0.81	1.75	0.28	1.09	0.77

Thread Pattern conform to ANSI / ASME B1.20.1, NPT

Stainless Castings conform to ASTM A351

Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479

Manufactured in accordance to ISO 9001: 2000

Project Name: _____

Job #: _____

SELECT	SIZE	A	C	D	L	T
☐	1 1/2 x 1/4	0.81	2.00	0.31	1.12	0.46
☐	1 1/2 x 3/8	0.81	2.00	0.31	1.12	0.46
☐	1 1/2 x 1/2	0.81	2.00	0.31	1.12	0.60
☐	1 1/2 x 3/4	0.81	2.00	0.31	1.12	0.62
☐	1 1/2 x 1	0.81	2.00	0.31	1.12	0.77
☐	1 1/2 x 1 1/4	0.81	2.00	0.31	1.12	0.80
☐	2 x 1/4	0.88	2.50	0.34	1.22	0.46
☐	2 x 3/8	0.88	2.50	0.34	1.22	0.46
☐	2 x 1/2	0.88	2.50	0.34	1.22	0.60
☐	2 x 3/4	0.88	2.50	0.34	1.22	0.62
☐	2 x 1	0.88	2.50	0.34	1.22	0.77
☐	2 x 1 1/4	0.88	2.50	0.34	1.22	0.80
☐	2 x 1 1/2	0.88	2.50	0.34	1.22	0.81
☐	2 1/2 x 1/2	1.06	3.00	0.38	1.44	0.65
☐	2 1/2 x 3/4	1.06	3.00	0.38	1.44	0.62
☐	2 1/2 x 1	1.06	3.00	0.38	1.44	0.75
☐	2 1/2 x 1 1/4	1.06	3.00	0.38	1.44	0.80
☐	2 1/2 x 1 1/2	1.06	3.00	0.38	1.44	0.81
☐	2 1/2 x 2	1.06	3.00	0.38	1.44	0.85
☐	3 x 1/2	1.12	3.74	0.41	1.54	0.65
☐	3 x 3/4	1.12	3.74	0.41	1.54	0.62
☐	3 x 1	1.12	3.74	0.41	1.54	0.75
☐	3 x 1 1/4	1.12	3.74	0.41	1.54	0.79
☐	3 x 1 1/2	1.12	3.74	0.41	1.54	0.81
☐	3 x 2	1.12	3.74	0.41	1.54	0.85
☐	3 x 2 1/2	1.12	3.74	0.41	1.54	1.23
☐	4 x 1	1.25	4.63	0.60	1.85	0.77
☐	4 x 1 1/4	1.25	4.63	0.60	1.85	0.79
☐	4 x 1 1/2	1.25	4.63	0.60	1.85	0.81
☐	4 x 2	1.25	4.63	0.60	1.85	0.85
☐	4 x 2 1/2	1.25	4.63	0.60	1.85	1.23
☐	4 x 3	1.25	4.63	0.60	1.85	1.33

Thread Pattern conform to ANSI / ASME B1.20.1, NPT

Stainless Castings conform to ASTM A351

Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479

Manufactured in accordance to ISO 9001: 2000