
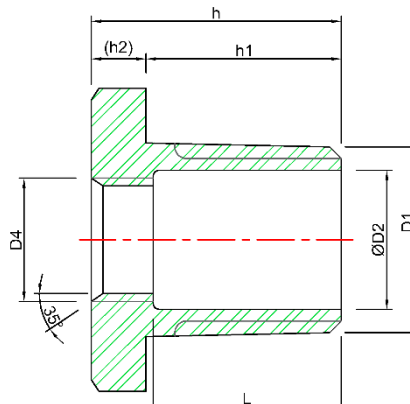


Class 150 # - CAST FITTINGS, ASTM A351 - Regular Pattern

HEX BUSHINGS



Grade: ☐ T304/CF8 ☐ T316/CF8M
Connection: ☐ Threaded
Source: ☐ Import ☐ Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	L	D1	D2	D4	h	h1	(h2)
☐	1/4 x 1/8	0.67	0.59	1/4	0.33	1/8	0.89	0.67	0.22
☐	3/8 x 1/8	0.87	0.59	3/8	0.43	1/8	0.91	0.67	0.24
☐	3/8 x 1/4	0.87	-----	3/8	0.43	1/4	0.91	0.67	0.24
☐	1/2 x 1/8	1.02	0.67	1/2	0.57	1/8	1.00	0.79	0.22
☐	1/2 x 1/4	1.02	0.67	1/2	0.57	1/4	1.00	0.79	0.22
☐	1/2 x 3/8	1.02	-----	1/2	0.57	3/8	1.00	0.79	0.22
☐	3/4 x 1/8	1.26	0.69	3/4	0.71	1/8	1.04	0.79	0.26
☐	3/4 x 1/4	1.26	0.69	3/4	0.71	1/4	1.04	0.79	0.26
☐	3/4 x 3/8	1.26	0.69	3/4	0.71	3/8	1.04	0.79	0.26
☐	3/4 x 1/2	1.26	-----	3/4	0.71	1/2	1.04	0.79	0.26
☐	1 x 1/8	1.50	0.96	1	1.02	1/8	1.32	1.00	0.31
☐	1 x 1/4	1.50	0.96	1	1.02	1/4	1.32	1.00	0.31
☐	1 x 3/8	1.50	0.96	1	1.02	3/8	1.32	1.00	0.31
☐	1 x 1/2	1.50	0.87	1	1.02	1/2	1.32	1.00	0.31
☐	1 x 3/4	1.50	0.81	1	1.02	3/4	1.32	1.00	0.31
☐	1 1/4 x 1/8	1.81	1.02	1 1/4	13.8	1/8	1.34	1.02	0.31
☐	1 1/4 x 1/4	1.81	0.96	1 1/4	13.8	1/4	1.34	1.02	0.31
☐	1 1/4 x 3/8	1.81	0.96	1 1/4	13.8	3/8	1.34	1.02	0.31
☐	1 1/4 x 1/2	1.81	0.91	1 1/4	13.8	1/2	1.34	1.02	0.31
☐	1 1/4 x 3/4	1.81	0.83	1 1/4	13.8	3/4	1.34	1.02	0.31
☐	1 1/4 x 1	1.81	0.77	1 1/4	13.8	1	1.34	1.02	0.31

Thread Pattern conform to ANSI / ASME B1.20.1, NPT

No Lead

Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479

Project Name: _____
Job #: _____

150# CAST
A351
(H Bush)

SELECT	SIZE	A	L	D1	D2	D4	h	h1	(h2)
☐	1 1/2 x 1/8	2.05	1.06	1 1/2	1.57	1/8	1.42	1.02	0.39
☐	1 1/2 x 1/4	2.05	1.06	1 1/2	1.57	1/4	1.42	1.02	0.39
☐	1 1/2 x 3/8	2.05	1.02	1 1/2	1.57	3/8	1.42	1.02	0.39
☐	1 1/2 x 1/2	2.05	0.94	1 1/2	1.57	1/2	1.42	1.02	0.39
☐	1 1/2 x 3/4	2.05	0.91	1 1/2	1.57	3/4	1.42	1.02	0.39
☐	1 1/2 x 1	2.05	0.83	1 1/2	1.57	1	1.42	1.02	0.39
☐	1 1/2 x 1 1/4	2.05	0.73	1 1/2	1.57	1 1/4	1.42	1.02	0.39
☐	2 x 1/8	2.48	1.10	2	2.01	1/8	1.42	1.00	0.41
☐	2 x 1/4	2.48	1.06	2	2.01	1/4	1.42	1.00	0.41
☐	2 x 3/8	2.48	1.06	2	2.01	3/8	1.42	1.00	0.41
☐	2 x 1/2	2.48	0.98	2	2.01	1/2	1.42	1.00	0.41
☐	2 x 3/4	2.48	0.91	2	2.01	3/4	1.42	1.00	0.41
☐	2 x 1	2.48	0.87	2	2.01	1	1.42	1.00	0.41
☐	2 x 1 1/4	2.48	0.79	2	2.01	1 1/4	1.42	1.00	0.41
☐	2 x 1 1/2	2.48	0.79	2	2.01	1 1/2	1.42	1.00	0.41
☐	2 1/2 x 1/2	3.15	1.52	2 1/2	2.48	1/2	1.93	1.46	0.47
☐	2 1/2 x 3/4	3.15	1.44	2 1/2	2.48	3/4	1.93	1.46	0.47
☐	2 1/2 x 1	3.15	1.36	2 1/2	2.48	1	1.93	1.46	0.47
☐	2 1/2 x 1 1/4	3.15	1.24	2 1/2	2.48	1 1/4	1.93	1.46	0.47
☐	2 1/2 x 1 1/2	3.15	1.18	2 1/2	2.48	1 1/2	1.93	1.46	0.47
☐	2 1/2 x 2	3.15	1.14	2 1/2	2.48	2	1.93	1.46	0.47
☐	3 x 1/2	3.74	1.54	3	3.03	1/2	1.97	1.46	0.51
☐	3 x 3/4	3.74	1.46	3	3.03	3/4	1.97	1.46	0.51
☐	3 x 1	3.74	1.38	3	3.03	1	1.97	1.46	0.51
☐	3 x 1 1/4	3.74	1.26	3	3.03	1 1/4	1.97	1.46	0.51
☐	3 x 1 1/2	3.74	1.22	3	3.03	1 1/2	1.97	1.46	0.51
☐	3 x 2	3.74	1.18	3	3.03	2	1.97	1.46	0.51
☐	3 x 2 1/2	3.74	1.02	3	3.03	2 1/2	1.97	1.46	0.51
☐	4 x 1/2	4.72	1.57	4	3.98	1/2	2.01	1.46	0.55
☐	4 x 3/4	4.72	1.52	4	3.98	3/4	2.01	1.46	0.55
☐	4 x 1	4.72	1.42	4	3.98	1	2.01	1.46	0.55
☐	4 x 1 1/4	4.72	1.32	4	3.98	1 1/4	2.01	1.46	0.55
☐	4 x 1 1/2	4.72	1.26	4	3.98	1 1/2	2.01	1.46	0.55
☐	4 x 2	4.72	1.22	4	3.98	2	2.01	1.46	0.55
☐	4 x 2 1/2	4.72	1.10	4	3.98	2 1/2	2.01	1.46	0.55
☐	4 x 3	4.72	1.02	4	3.98	3	2.01	1.46	0.55

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
No Lead

Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479