
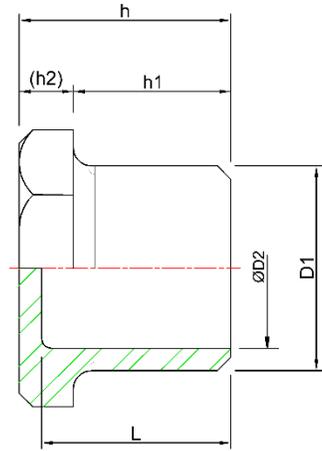


Project Name: \_\_\_\_\_  
Job #: \_\_\_\_\_

## Class 150 # - CAST FITTINGS, ASTM A351 - Regular Pattern

### HEX HEAD PLUGS



- Grade:  T304/CF8  T316/CF8M  
 Connection:  Threaded  
 Source:  Import  Domestic

## DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	D1	D2	L	A	h	h1	(h2)
<input type="checkbox"/>	1/8	1/8	-----	-----	0.55	0.71	0.43	0.24
<input type="checkbox"/>	1/4	1/4	-----	-----	0.67	0.91	0.67	0.24
<input type="checkbox"/>	3/8	3/8	0.35	0.81	0.83	0.93	0.67	0.26
<input type="checkbox"/>	1/2	1/2	0.57	0.98	1.02	1.10	0.79	0.31
<input type="checkbox"/>	3/4	3/4	0.71	0.98	1.26	1.10	0.79	0.31
<input type="checkbox"/>	1	1	1.02	1.18	1.50	1.34	0.98	0.35
<input type="checkbox"/>	1 1/4	1 1/4	1.34	1.22	1.81	1.38	0.98	0.39
<input type="checkbox"/>	1 1/2	1 1/2	1.52	1.30	2.05	1.42	0.98	0.43
<input type="checkbox"/>	2	2	1.97	1.34	2.56	1.48	1.02	0.45
<input type="checkbox"/>	2 1/2	2 1/2	2.36	1.38	3.15	1.57	1.10	0.47
<input type="checkbox"/>	3	3	2.95	1.54	3.74	1.77	1.26	0.51
<input type="checkbox"/>	4	4	3.94	1.77	4.72	2.01	1.46	0.55

Thread Pattern conform to ANSI / ASME B1.20.1, NPT  
 No Lead  
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479