


**Class 150 # - CAST FITTINGS, ASTM A351 -
Regular Pattern**

HOSE NIPPLES

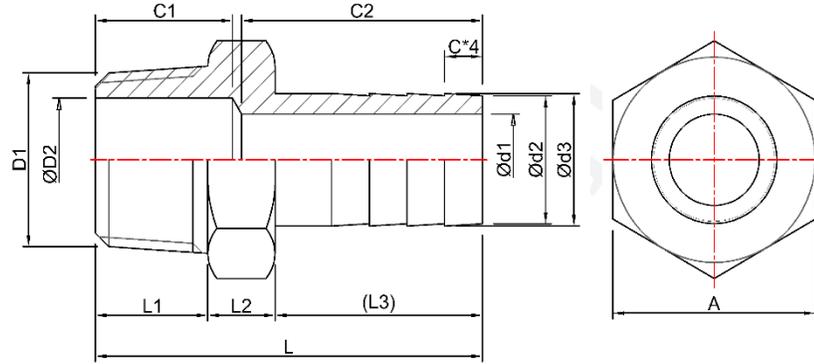

- Grade: T304/CF8 T316/CF8M
 Connection: Threaded
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	D1	D2	C	C1	C2	L	L1	L2	(L3)	d1	d2	d3
<input type="checkbox"/>	1/4	0.63	1/4	0.26	0.16	0.67	1.10	1.83	0.51	0.39	0.93	0.20	0.31	0.35
<input type="checkbox"/>	3/8	0.75	3/8	0.37	0.22	0.71	1.30	2.24	0.51	0.39	1.12	0.26	0.39	0.43
<input type="checkbox"/>	1/2	0.98	1/2	0.57	0.26	0.75	1.61	2.46	0.61	0.39	1.46	0.57	0.53	0.57
<input type="checkbox"/>	3/4	1.22	3/4	0.71	0.33	0.91	1.89	2.85	0.71	0.45	1.69	0.57	0.77	0.81
<input type="checkbox"/>	1	1.50	1	1.02	0.35	0.98	2.17	3.23	0.77	0.49	1.97	0.79	1.00	1.05
<input type="checkbox"/>	1 1/4	1.81	1 1/4	1.38	0.37	1.10	1.89	3.15	0.89	0.49	2.09	1.06	1.28	1.34
<input type="checkbox"/>	1 1/2	2.05	1 1/2	1.57	0.41	1.22	2.28	3.64	0.91	0.53	2.20	1.30	1.52	1.59
<input type="checkbox"/>	2	2.56	2	2.03	0.51	1.30	2.91	4.31	0.96	0.59	2.76	1.77	1.99	2.07
<input type="checkbox"/>	2 1/2	3.15	2 1/2	2.64	0.63	1.46	3.74	5.35	1.06	0.63	3.66	2.08	2.44	2.52
<input type="checkbox"/>	3	3.78	3	3.07	0.67	1.69	3.94	5.79	1.30	0.67	3.82	2.76	2.95	3.07
<input type="checkbox"/>	4	4.72	4	4.02	0.83	1.89	4.13	6.22	1.42	0.71	4.09	3.54	3.98	4.09

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 No Lead
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479