


Class 150 # - CAST FITTINGS, ASTM A351 - Regular Pattern

TEES

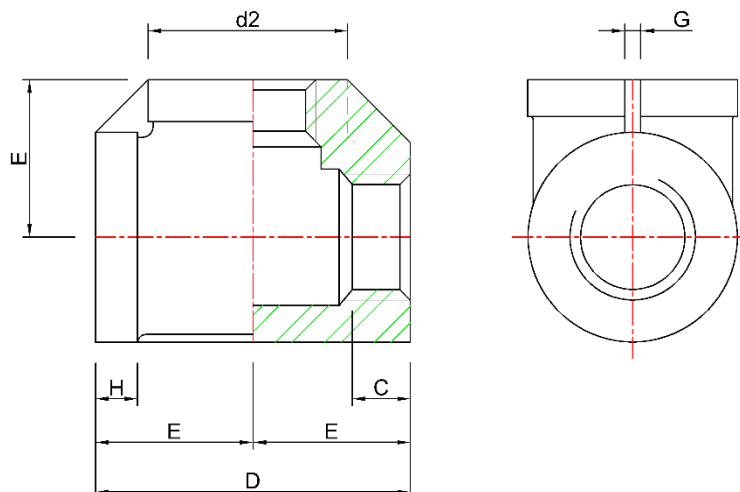

Grade: ☐ T304/CF8 ☐ T316/CF8M
Connection: ☐ Threaded
Source: ☐ Import ☐ Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	d1	d2	d3	C	D	E	G	H	I
☐	1/8	1/8	0.63	0.53	0.24	1.42	0.71	0.12	0.24	0.10
☐	1/4	1/4	0.75	0.61	0.37	1.04	0.77	0.12	0.24	0.08
☐	3/8	3/8	0.89	0.77	0.38	1.85	0.93	0.12	0.26	0.10
☐	1/2	1/2	1.10	1.02	0.39	2.28	1.14	0.12	0.30	0.08
☐	3/4	3/4	1.34	1.24	0.39	2.56	1.28	0.12	0.33	0.08
☐	1	1	1.69	1.57	0.51	2.91	1.46	0.16	0.37	0.08
☐	1 1/4	1 1/4	2.01	1.89	0.65	3.50	1.75	0.20	0.41	0.08
☐	1 1/2	1 1/2	2.32	2.22	0.63	3.82	1.91	0.20	0.45	0.10
☐	2	2	2.83	2.68	0.71	4.45	2.22	0.24	0.47	0.10
☐	2 1/2	2 1/2	3.54	3.39	0.91	5.35	2.68	0.35	0.57	0.16
☐	3	3	4.17	4.00	0.96	6.18	3.09	0.39	0.59	0.16
☐	4	4	5.20	5.00	1.02	7.68	3.84	0.35	0.61	0.16

Thread Pattern conform to ANSI / ASME B1.20.1, NPT, 1, NPT

No Lead/No Lead

Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479M A479