
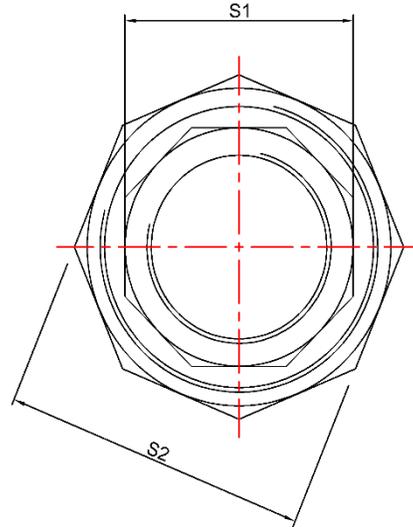


**Class 150 # - CAST FITTINGS, ASTM A351 -
Regular Pattern**

UNION - THREADED

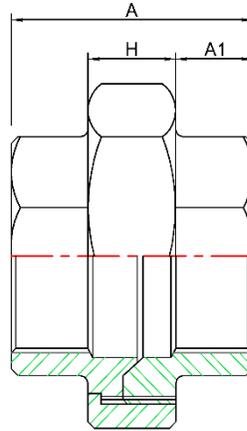

- Grade: T304/CF8 T316/CF8M
 Connection: Threaded
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	A1	H	S1	S2
<input type="checkbox"/>	1/8	1.46	0.47	0.59	0.71	1.14
<input type="checkbox"/>	1/4	1.46	0.47	0.59	0.71	1.14
<input type="checkbox"/>	3/8	1.54	0.47	0.63	0.91	1.42
<input type="checkbox"/>	1/2	1.61	0.51	0.59	1.06	1.61
<input type="checkbox"/>	3/4	1.65	0.63	0.63	1.26	1.93
<input type="checkbox"/>	1	2.01	0.67	0.71	1.61	2.28
<input type="checkbox"/>	1 1/4	2.05	0.63	0.83	1.97	2.68
<input type="checkbox"/>	1 1/2	2.20	0.71	0.87	2.20	3.03
<input type="checkbox"/>	2	2.36	0.71	0.98	2.72	3.62
<input type="checkbox"/>	2 1/2	2.95	1.02	0.98	3.35	4.29
<input type="checkbox"/>	3	3.50	1.18	1.14	3.90	4.92
<input type="checkbox"/>	4	3.90	1.26	1.34	4.92	6.14

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 No Lead
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479