
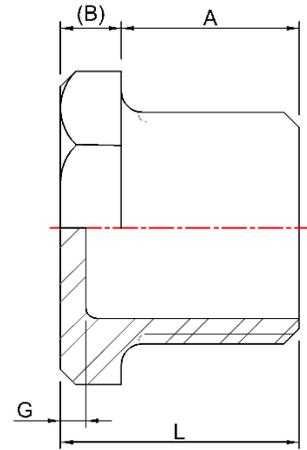


Project Name: _____
Job #: _____

Class 150# - CAST FITTINGS, ASTM A351 - MSS
SP114 Heavy Pattern

HEAVY PATTERN HEX HEAD PLUG

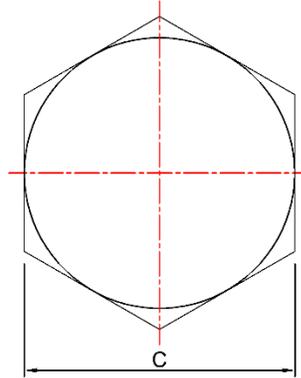

- Grade: T304/CF8 T316/CF8M
 Connection: Threaded
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	B	C	G	L
<input type="checkbox"/>	1/8	0.37	0.14	0.55	----	0.51
<input type="checkbox"/>	1/4	0.44	0.14	0.67	----	0.58
<input type="checkbox"/>	3/8	0.48	0.16	0.83	----	0.64
<input type="checkbox"/>	1/2	0.56	0.19	1.02	0.16	0.76
<input type="checkbox"/>	3/4	0.63	0.22	1.20	0.18	0.85
<input type="checkbox"/>	1	0.75	0.25	1.43	0.20	1.00
<input type="checkbox"/>	1 1/4	0.80	0.28	1.76	0.22	1.09
<input type="checkbox"/>	1 1/2	0.83	0.31	2.00	0.24	1.14
<input type="checkbox"/>	2	0.88	0.34	2.48	0.26	1.22
<input type="checkbox"/>	2 1/2	1.07	0.37	2.98	0.29	1.44
<input type="checkbox"/>	3	1.13	0.40	3.86	0.31	1.53
<input type="checkbox"/>	4	1.22	0.50	4.63	0.38	1.72

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 Stainless Castings conform to ASTM A351
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479
 Manufactured in accordance to ISO 9001: 2000