
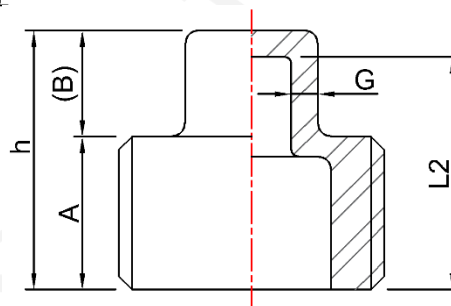


Project Name: _____
Job #: _____

Class 150# - CAST FITTINGS, ASTM A351 - MSS SP114 Heavy Pattern

HEAVY PATTERN SQUARE PLUG



Grade: ☐ T304/CF8 ☐ T316/CF8M
Connection: ☐ Threaded
Source: ☐ Import ☐ Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	(B)	C	L2	h	G
☐	1/8	0.37	0.24	0.28	----	0.61	----
☐	1/4	0.44	0.28	0.37	----	0.72	----
☐	3/8	0.48	0.31	0.44	----	0.79	----
☐	1/2	0.56	0.38	0.56	0.78	0.94	0.16
☐	3/4	0.63	0.44	0.63	0.89	1.07	0.18
☐	1	0.75	0.50	0.81	1.05	1.25	0.20
☐	1 1/4	0.80	0.56	0.94	1.15	1.37	0.22
☐	1 1/2	0.83	0.62	1.13	1.21	1.45	0.24
☐	2	0.88	0.68	1.31	1.30	1.56	0.26
☐	2 1/2	1.07	0.74	1.50	1.52	1.81	0.29
☐	3	1.13	0.80	1.69	1.62	1.93	0.31
☐	4	1.22	1.00	2.25	1.84	2.22	0.38

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
Stainless Castings conform to ASTM A351
Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479
Manufactured in accordance to ISO 9001: 2000