


Project Name: _____

Job #: _____

Class 150# - CAST FITTINGS, ASTM A351 – MSS SP114 Heavy Pattern

HEAVY PATTERN STREET 90° ELBOW

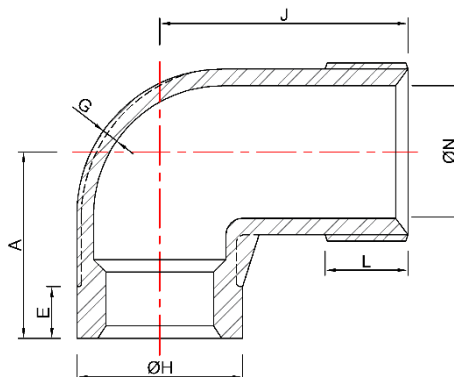

Grade: ☐ T304/CF8 ☐ T316/CF8M
Connection: ☐ Threaded
Source: ☐ Import ☐ Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	A	E	G	H	J	N	L
☐	1/8	0.81	0.20	0.09	0.75	1.06	0.19	0.26
☐	1/4	0.81	0.20	0.09	0.84	1.18	0.24	0.40
☐	3/8	0.93	0.21	0.10	1.01	1.43	0.36	0.41
☐	1/2	1.12	0.25	0.10	1.20	1.62	0.51	0.53
☐	3/4	1.31	0.27	0.12	1.46	1.87	0.69	0.55
☐	1	1.50	0.30	0.13	1.77	2.12	0.91	0.68
☐	1 1/4	1.75	0.34	0.14	2.15	2.50	1.18	0.71
☐	1 1/2	1.93	0.37	0.15	2.43	2.75	1.38	0.72
☐	2	2.25	0.42	0.17	2.96	3.25	1.89	0.76
☐	2 1/2	2.68	0.48	0.21	3.31	3.87	2.19	1.14
☐	3	3.06	0.55	0.23	4.00	4.50	2.78	1.20
☐	4	3.81	0.66	0.26	5.06	5.68	3.68	1.30

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
Stainless Castings conform to ASTM A351
Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479
Manufactured in accordance to ISO 9001: 2000