
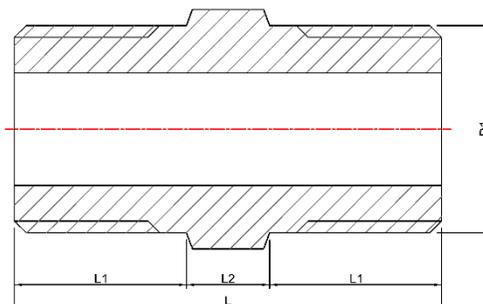


Project Name: _____
Job #: _____

Class 150 # - CAST FITTINGS, ASTM A351 - Regular Pattern

HEX NIPPLES



- Grade: T304/CF8 T316/CF8M
 Connection: Threaded Domestic
 Source: Import Domestic

DIMENSIONS

UOM: Inches/LBS

SELECT	SIZE	D1	A	L	L1	L2
<input type="checkbox"/>	1/8	1/8	0.51	1.22	0.47	0.28
<input type="checkbox"/>	1/4	1/4	0.59	1.30	0.51	0.28
<input type="checkbox"/>	3/8	3/8	0.79	1.65	0.67	0.31
<input type="checkbox"/>	1/2	1/2	0.9	1.97	0.79	0.39
<input type="checkbox"/>	3/4	3/4	1.14	2.01	0.79	0.43
<input type="checkbox"/>	1	1	1.42	2.48	1.00	0.47
<input type="checkbox"/>	1 1/4	1 1/4	1.81	2.32	0.93	0.47
<input type="checkbox"/>	1 1/2	1 1/2	2.01	2.52	0.98	0.55
<input type="checkbox"/>	2	2	2.48	2.68	1.06	0.55
<input type="checkbox"/>	2 1/2	2 1/2	3.15	2.87	1.10	0.67
<input type="checkbox"/>	3	3	3.74	3.39	1.34	0.71
<input type="checkbox"/>	4	4	4.72	3.54	1.42	0.71

Thread Pattern conform to ANSI / ASME B1.20.1, NPT
 No Lead
 Stainless Wrought Fittings conform To ASTM A182, Barstock to ASTM A479